

Generating Set

TECHNICAL DATA SHEET

NGT250



Silent / Closed Type
Image for illustration purposes only.

Prime Power*	Standby Power**	Voltage/Ph	Hz/rpm***	PF
230kVA/184 kWe	250 kVA/200 kWe	400/3Ph	50/1500	0.8

Prime power*

Unlimited hours usage with an average load factor of 80% of the published Prime power over each 24-hour period.
A 10% overload is available for 1 hour in every 12 hours of operation.

Standby power**

Limited to 500 hours of annual usage with an average load factor of 80% of the published Standby power rating over each 24 hours. Up to 300 hours of annual usage may be run continuously. No overload is permitted on Standby power.
Available in 60Hz for all voltage ratings.***

Standard Reference Conditions

Note: Standard reference conditions 40°C (104°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity

DIESEL GENERATOR SET

Engine Make /Model	PERKINS 1506-E88TAG2
Alternator Make /Model	Leroy Somer TAL-046-C
Control Panel	DSE 6120
Base Frame / Silent Canopy	Robust Structure/ Corrosion Resistant
Circuit Breaker Type	3 Pole MCCB (4P Available as optional)
Built in Base Fuel Tank Capacity	460 L
Battery	Maintenance free Lead Acid

Dimensions	Length (mm)	Width (mm)	Height (mm)	Weight (KG)
Close Type	3822	1422	1900	3113
Open Type	2900	1150	1870	2497

ENGINE SPECIFICATIONS

Engine Make /Model	Perkins 11506-E88TAG2
No. of Cylinders	6 vertical in-line
Cycle	4 Stroke
Aspiration	Turbocharged
Cooling Method	Water cooled
Governing Type	Mechanical
Governing Class	G2 - ISO 8528 Part 1
Compression Ratio	16.1:1
Displacement	8.8 L
Bore/Stroke	112 x 149 mm
Dynamic Charging Alternator	45AMP, 24V

COOLING SYSTEM

Total Coolant Capacity (L)	29.6 L
Cooling Fan Air Flow	370 m ³ / min
Radiator Fan Load	8 kW
Cooling system design	50 °C
Heat Radiation to Room (PRP)	13.2 kW

LUBRICATION SYSTEM

Oil Filter Type	Spin-On Full Flow
Total Oil Capacity	41 L
Oil Type	API-CH-4 or ACEA E5

AIR SYSTEM

Air Filter Type	Dry Element
Combustion Air Flow (PRP)	14.4 m ³ /min
Combustion Air Flow (ESP)	15 m ³ /min
Max Air Filter Intake Restriction	6.2 kPa

EXHAUST SYSTEM

Muffler Type	Residential Grade
Max. Back Pressure	10 kPa
Exhaust Gas Flow (PRP/ESP)	34.4 /35.7 m ³ / min
Exhaust Gas Temperature	≤ 475 °C

COMPLY WITH STANDARDS

ISO 3046, BS 5514, DIN 6271, NEMA-MGI, DIN EN, BS 5000, IEC 60034, IEC 60947-2

POWERED BY:

ENGINE	ALTERNATOR	CONTROL PANEL
		



Why NOOR Generator Technology (NGT)?

When you are running a business, every competitive advantage counts; choosing the right Generator Set can make all the difference to the bottom line.

1. Features & Benefits:


- NGT Gen set is powered by Perkins Engine, the world leader, having over 85 years of innovation and excellence, with customer support in 182 countries from 3500 outlets.
- NGT Gen set is powered by Leroy Somer France Alternator, the Global number 1 in Alternators, with over 99 years of Experience, having 120+ active patents, in over 40 countries, and over 80 service centers.
- NGT Gen set is equipped with a DSE controller, one of the world's top manufacturers in the UK, having over 40 years of excellence, the most advanced and user-friendly controller.
- Low fuel consumption, saving on fuel spend.
- Compact and rugged design, saving on transport and storage costs.
- Designed to occupy less space, considering critical applications and cities where space is at a premium.
- Low noise and vibration, considering critical applications where noise level matters.
- Easy maintenance and long service intervals, saving on maintenance cost
- Subject to rigorous tests including load acceptance, cooling, vibration and noise level prior shipment to customer.
- Simple to operate and environment friendly in worst ambient conditions.
- Equipped with built-in fuel tank sufficient for 8 to 10 hours of operations.
- Fully Engineering wide range of optional accessories available.

(Contd.)

Generating Set

TECHNICAL DATA SHEET

NGT220




PERKINS ENGINE
1506-E88TAG2



LEROY SOMER
TAL-046-C



DSE6120 MKII
Auto Start & Auto Mains



NGT ENCLOSURE / CANOPY

ENGINE FUEL SYSTEM

Recommended Fuel	Class A2 Diesel
Fuel Consumption Standby	51.5 L/hr
Fuel Consumption 100% PRP	48.6 L/hr
Fuel Consumption 75% PRP	35.7 L/hr
Fuel Consumption 50% PRP	23.5 L/hr

ALTERNATOR SPECIFICATIONS

Alternator Make /Model	Leroy Somer TAL-046-C
AVR Model	R150
Number of Poles	4
Number of Winding Leads	6
Type of Bearing	Single Bearing
Insulation Class - Temp Rise	Cont. H - 125/40°C
Ingress Protection Rating	IP 23
Excitation System	Self Excited
Voltage Regulation	+/- 1%
Harmonic Coefficient	< 2%
THF Tel. influence TIF	< 50
Cooling air flow	0.48 m ³ / Sec

CONTROLLER MAKE & MODEL DEESEA 6120

Operation Mode	AMF
Display	Graphic Back-lit LCD (128x64) pixels
Ingress Protection Rating	IP65
Binary Inputs/Outputs	4 / 4
Analog Inputs	3
Measurement	Vac, A, Hz, kVA, kW, Vdc
Event Log	Alarms log, Hrs log
Communication	USB

Please refer to Controller Data Sheet for more details.


ENCLOSURE

Enclosure Type	Acoustic & Weather Proof
Drainage	Fuel and Water Drainage Provision
Transportation	Tested Single Point Lifting Facility & Forklift Pockets
Ingress Protection	IP 23
Lifting	ISO Standard Lifting
Canopy RAL Color	RAL 9010 - Powder coated
Base frame RAL Color	RAL 9011 - Powder coated
Noise Pressure level @	68.1db(A)/+-3db @ 7 mt

Distributed & Serviced by:

Bahmani General Trading Co. LLC
Plot No 5981768,
38th St. 33 Main Road
Dubai Investment Park 1
P.O.Box 86362 Dubai, U.A.E.
800 BAHMANI (224 6264)

B BAHMANI
General Trading Co. LLC

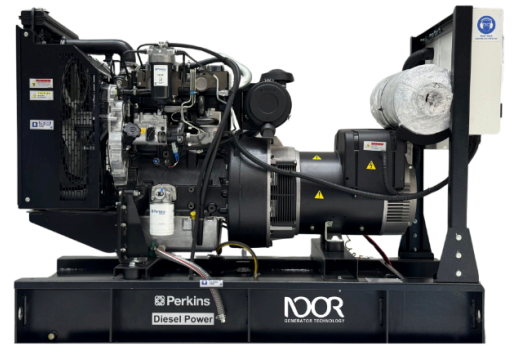

Open Type

Image for illustration purposes only

2. WARRANTY POLICY:

- Noor Generator technology products has a warranty for all prime equipment, limited to 3000 running hours or 12 months warranty & For Standby equipment, Limited to 500 running hours or 12 months warranty whichever occur first against manufacturing defect.
- Wearing parts (filters), incorrect manmade operation, Back up Genset maintenance failures are excluded from the warranty policy
- For more details please refer to www.bahmanigt.com

3. DOCUMENTATION

Operation and Maintenance Manual, GAD, Wiring Diagram & FAT Report are Accompanied with Genset.

4. OPTIONAL FEATURES

A. Engine

- Heavy-Duty Air Filter
- Coolant Heater
- Lubricant Oil Heater
- Fuel and Water Separator
- Lube Oil Rotary Pump

B. Alternator

- Anti Condensation Heater
- PMG + AVR
- Double Bearing Alternator
- RTDs For Bearing and Winding

C. Cooling System:

- 55 degree Radiator
- Remote Radiator

D. Control System:

- AMF / Parallel
- Remote Annunciators
- 4 p manual/Motorized Circuit breaker

E. Automatic Transfer Switch (ATS):

- Contractor or Breaker type ATS
- Motorized changeover type ATS

F. Start Battery:

- Nickel-cadmium battery
- Maintenance-free battery
- Battery charger and selector switch
- Charging current meter

G. Exhaust Muffler:

- Residential grade
- Critical grade
- Hospital grade

H. Available for voltages :

- 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V